

Setting for grid operator of Czech Republic

SolaX power Co., Ltd.

hereby confirms that the following inverters fulfill EN 50438:2013:

SK-SU3700E, SK-SU3700C, SK-TL3700E, SK-TL3700C, SK-TL3700R
SK-SU3000E, SK-SU3000C, SK-TL3000E, SK-TL3000C, SK-TL3000R

1. Grid parameters below can be set following the service manual.

Lower frequency limit: $F_n - 2,5\text{Hz} = 47,5\text{Hz}$; max. disconnection time: 0,5s

Upper frequency limit: $F_n + 2,0\text{Hz} = 52,0\text{Hz}$; max. disconnection time: 0,5s

Upper voltage limit 1: $230\text{V} + 10\% = 253,0\text{V}$; max. disconnection time 3s ; RMS mean over 10 min. according to EN 61000-4-30 with update of the value every 3s .

Upper voltage limit 2: $230\text{V} + 15\% = 264,5\text{V}$; max. disconnection time: 0,2s

Upper voltage limit 3: $230\text{V} + 20\% = 276\text{V}$; max. disconnection time: 0,1s

Low voltage limit : $230\text{V} - 15\% = 195,5\text{V}$; max. disconnection time: 1,5s

2. Q(U) function can be set to the values of figure 1 by following the service manual.

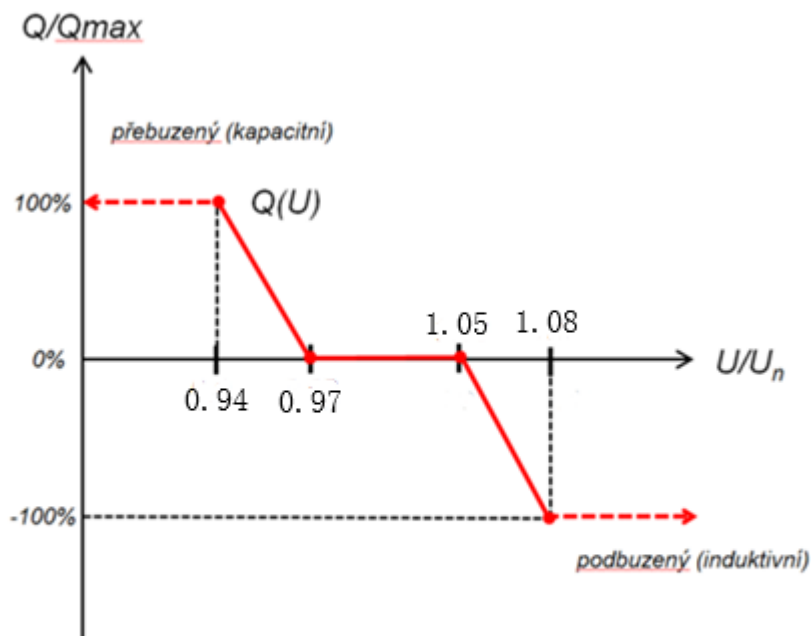


Figure 1

3. P(U) function can be set to the values of figure 2 without any need for parameterization.


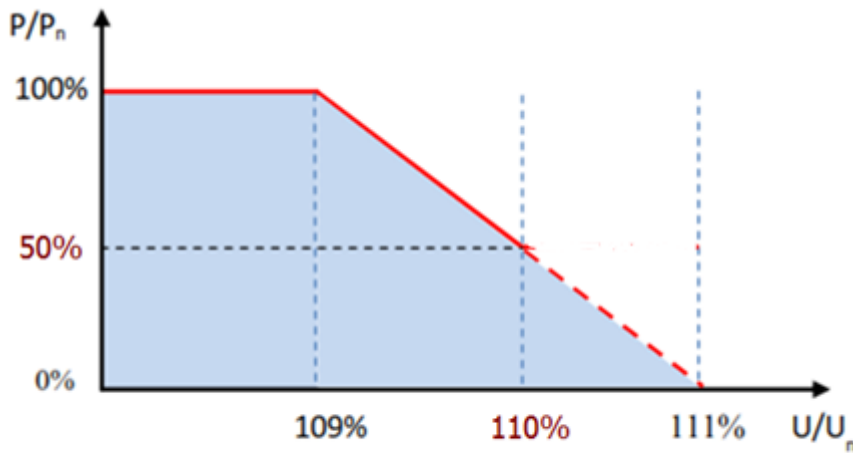


Figure 2.

4. The active power response to over-frequency will be carried out according to the standard of following picture without any need for parameterization.

Defaultní prahová frekvence v ČR je 50,2 Hz, statika $s_2 = 5\%$

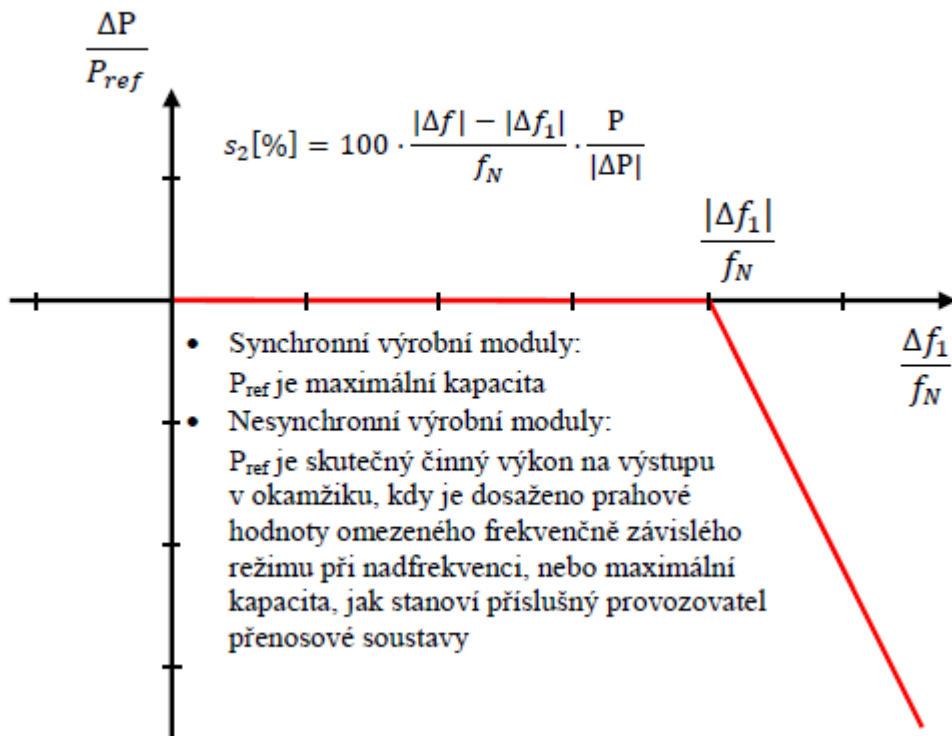

5. The increase of active power with a gradient of 10% Pn per minute according to chapter 9.5 and the reconnection limits for frequency (48,0-50,1Hz) and voltage (85%-110%Vn) as well as the monitoring time for reconnection (300s) can be fulfilled as required with the CZ setup without any need for parameterization.

SolaX power Co., Ltd.

Room 220, West Buliding A, National University Science and Technology Park of Zhejiang University 525, Xixi Rd, Hangzhou, Zhejiang Province, China, 310007

Guo Huawei

Technical manager

2018.02.27