



BV LCIE
CHINA
Number

N°1966AS07SXP32028

ATTESTATION of conformity with European Directives

Product: PV inverter (Grid-tied photovoltaic inverter)
Reference: X1-2.5-S-D(L), X1-3.0-S-D(L), X1-3.3-S-D(L), X1-2.5-S-N(L), X1-3.0-S-N(L), X1-3.3-S-N(L), X1-2.5-S-D(O), X1-3.0-S-D(O), X1-3.3-S-D(O), X1-2.5-S-N(O), X1-3.0-S-N(O), X1-3.3-S-N(O)
Issued to: SolaX Power Network Technology (Zhe jiang) Co., Ltd
Address: No. 288 Shizhu Road, Tonglu Economic Development Zone, Dongxing District 311500, Tonglu City, Zhejiang Province, People's Republic of China
Manufacturer: SolaX Power Network Technology (Zhe jiang) Co., Ltd
Technical characteristics: See below table

The submitted sample of the above equipment has been tested for **CE** marking according to following European Directive and following standards:

Low Voltage Directive 2014/35/EU

Standards	Report number	Report date
EN 62109-1:2010 EN 62109-2:2011	SXP-19MY1303FCSHP-1 SXP-19MY1303FCSHP-2	2019-07-10


The referred test report(s) show that the product complies with standard(s) recognized as giving presumption of compliance with the essential requirements in the specified European Directive

This verification does not imply assessment of the production of the product
The **CE** marking may be affixed if all relevant and effective European Directives with **CE** are applicable

Shanghai (P.R. China), July 10th, 2019.



Haivey Wang
Product Line Manager

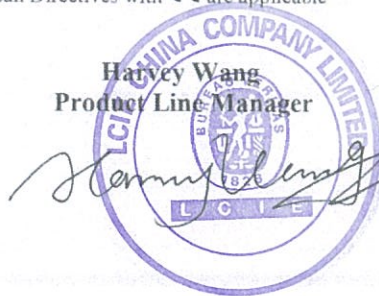

This document shall not be reproduced, except in full, without the written approval of BV LCIE China.
Information given in this document, are related to the tested specimen of the described electrical sample.

LCIE CHINA
必维欧亚电气技术咨询服务(上海)有限公司

Version 3/2016.02.19

Building 4, No. 518, Xin Zhuan Road,
CaoHejing Songjiang High-Tech Park,
Shanghai P.R.C (201612)

Tel: +86 21 6195 7000
Fax: +86 21 6195 7001
Email: contact@cn.bureauveritas.com



BV LCIE
CHINA
Number

N°1966AS07SXP32028


LCIE

Model / Type	X1-2.5-S-D(L) X1-2.5-S-N(L) X1-2.5-S-D(O) X1-2.5-S-N(O)	X1-3.0-S-D(L) X1-3.0-S-N(L) X1-3.0-S-D(O) X1-3.0-S-N(O)	X1-3.3-S-D(L) X1-3.3-S-N(L) X1-3.3-S-D(O) X1-3.3-S-N(O)
MPPT voltage range [V]	70-580 V d.c.		
Max DC voltage [V]	600 V d.c.		
Max DC current [A]	10 A d.c.		
Nominal AC voltage [V]	220/230/240V a.c. 50/60Hz		
Max AC current [A]	12 A a.c.	14 A a.c	15 A a.c
Nominal AC Apparent Power [VA]	2500	3000	3300

Shanghai (P.R. China), July 10th, 2019.



Harvey Wang
Product Line Manager

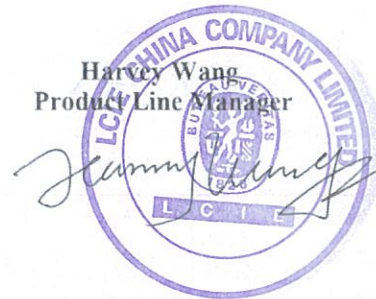

This document shall not be reproduced, except in full, without the written approval of BV LCIE China.
Information given in this document, are related to the tested specimen of the described electrical sample.

LCIE CHINA
必维欧亚电气技术咨询服务(上海)有限公司

Building 4, No. 518, Xin Zhuan Road,
CaoHejing Songjiang High-Tech Park,
Shanghai P.R.C (201612)

Tel: +86 21 6195 7000
Fax: +86 21 6195 7001
Email: contact@cn.bureauveritas.com

Version 3/2016.02.19