



# ATTESTATION of conformity with European Directives

*Product:* PV inverter (Grid-tied photovoltaic inverter)  
*Reference:* X1-3.0-T-D(L), X1-3.3-T-D(L), X1-3.6-T-D(L), X1-4.2-T-D(L), X1-4.6-T-D(L), X1-5.0-T-D(L), X1-5.3-T-D(L), X1-5.98-T-D(L), X1-3.0-T-N(L), X1-3.3-T-N(L), X1-3.6-T-N(L), X1-4.2-T-N(L), X1-4.6-T-N(L), X1-5.0-T-N(L), X1-5.3-T-N(L), X1-5.98-T-N(L), X1-3.0-T-D(O), X1-3.3-T-D(O), X1-3.6-T-D(O), X1-4.2-T-D(O), X1-4.6-T-D(O), X1-5.0-T-D(O), X1-5.3-T-D(O), X1-5.98-T-D(O), X1-3.0-T-N(O), X1-3.3-T-N(O), X1-3.6-T-N(O), X1-4.2-T-N(O), X1-4.6-T-N(O), X1-5.0-T-N(O), X1-5.3-T-N(O), X1-5.98-T-N(O),  
*Issued to:* SolaX Power Network Technology (Zhe jiang) Co., Ltd  
*Address:* No. 288 Shizhu Road, Tonglu Economic Development Zone, Dongxing District 311500, Tonglu City, Zhejiang Province, People's Republic of China  
*Manufacturer:* SolaX Power Network Technology (Zhe jiang) Co., Ltd  
*Technical characteristics:* See below table

The submitted sample of the above equipment has been tested for **CE** marking according to following European Directive and following standards:


### Low Voltage Directive 2014/35/EU

Standards	Report number	Report date
EN 62109-1:2010 EN 62109-2:2011	SXP-19MA1508FCSHP-1 SXP-19MA1508FCSHP-2	2019-06-27

The referred test report(s) show that the product complies with standard(s) recognized as giving presumption of compliance with the essential requirements in the specified European Directive

This verification does not imply assessment of the production of the product  
The **CE** marking may be affixed if all relevant and effective European Directives with **CE** are applicable

Shanghai (P.R. China), , June 27<sup>th</sup>, 2019.

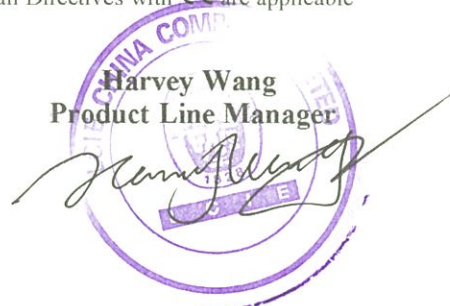

This document shall not be reproduced, except in full, without the written approval of BV LCIE China.  
Information given in this document, are related to the tested specimen of the described electrical sample.



LCIE

BV LCIE  
CHINA  
Number

N°1966AS06SXP31936

Model / Type.....	X1-3.0-T-D(L) X1-3.0-T-N(L) X1-3.0-T-D(O) X1-3.0-T-N(O)	X1-3.3-T-D(L) X1-3.3-T-N(L) X1-3.3-T-D(O) X1-3.3-T-N(O)	X1-3.6-T-D(L) X1-3.6-T-N(L) X1-3.6-T-D(O) X1-3.6-T-N(O)	X1-4.2-T-D(L) X1-4.2-T-N(L) X1-4.2-T-D(O) X1-4.2-T-N(O)
MPP DC voltage range [V].....	70-580			
MAX Input DC voltage [V].....	600			
Max Input DC current [A].....	12/12			
Output AC voltage [V].....	220/230/240V,50/60Hz			
Max.Output AC current [A].....	14	15	16,8	19
Output power [VA].....	3000	3300	3680	4200
Model / Type.....	X1-4.6-T-D(L) X1-4.6-T-N(L) X1-4.6-T-D(O) X1-4.6-T-N(O)	X1-5.0-T-D(L) X1-5.0-T-N(L) X1-5.0-T-D(O) X1-5.0-T-N(O)	X1-5.3-T-D(L) X1-5.3-T-N(L) X1-5.3-T-D(O) X1-5.3-T-N(O)	X1-5.98-T-D(L) X1-5.98-T-N(L) X1-5.98-T-D(O) X1-5.98-T-N(O)
MPP DC voltage range [V].....	70-580			
MAX Input DC voltage [V].....	600			
Max Input DC current [A].....	12/12			
Output AC voltage [V].....	220/230/240V,50/60Hz			
Max.Output AC current [A].....	21	22,7	22,7	22,7
Output power [VA].....	4600	5000	5000	5000

Shanghai (P.R. China), , June 27<sup>th</sup>, 2019.



Harvey Wang  
Product Line Manager



This document shall not be reproduced, except in full, without the written approval of BV LCIE China.  
Information given in this document, are related to the tested specimen of the described electrical sample.

LCIE CHINA  
必维欧亚电气技术咨询服务(上海)有限公司  
Version 3/2016.02.19

Building 4, No. 518, Xin Zhuan Road,  
CaoHejing Songjiang High-Tech Park,  
Shanghai P.R.C (201612)

Tel: +86 21 6195 7000  
Fax: +86 21 6195 7001  
Email: [contact@cn.bureauveritas.com](mailto:contact@cn.bureauveritas.com)